


Conexiones reusables para mangueras SAE 100 R5

Hembra giratoria codo 90° rosca UNF asiento hembra JIC 37 °

C5108

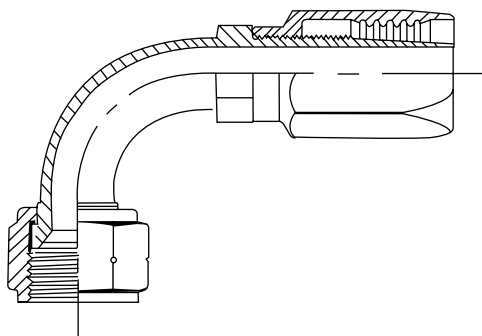


N° CODIGO SAE 100 R5	Manguera Ø Interno	TAMAÑO ROSCA
5108-04-04	3/16"	7/16"-20
5108-05-05	1/4"	1/2"-20
5108-06-06	5/16"	9/16"-18
5108-08-08	13/32"	3/4"-16
5108-10-10	1/2"	7/8"-14
5108-12-12	5/8"	1 1/16"-12
5108-16-16	7/8"	1 5/16"-12
5108-20-20	1 1/8"	1 5/8"-12
5108-24-24	1 3/8"	1 7/8"-12
5108-32-32	1 13/16"	2 1/2"-12

En forma especial se fabrican tambien en codos de 22°, 30°, 45°, 60°y 67°

Tubo abocardado recto con macho giratorio

C5121

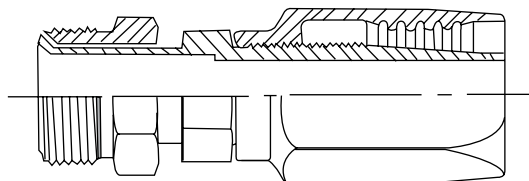

N° CODIGO SAE 100 R5	Manguera Ø Interno	Ø Exterior Tubo	TAMAÑO ROSCA
5121-04-04	3/16"	1/4"	7/16"-24
5121-05-05	1/4"	5/16"	1/2"-20
5121-06-06	5/16"	3/8"	5/8"-18
5121-08-08	13/32"	1/2"	3/4"-18
5121-10-10	1/2"	5/8"	7/8"-18

En forma especial se fabrican tambien en codos de 22°, 30°, 45°, 60°, 67° y 90°

"Poberaj SA se reserva el derecho de
modificar las características y medidas
de sus productos sin previo aviso".