


U-Packing

PU180

Dimensiones del sello y alojamiento

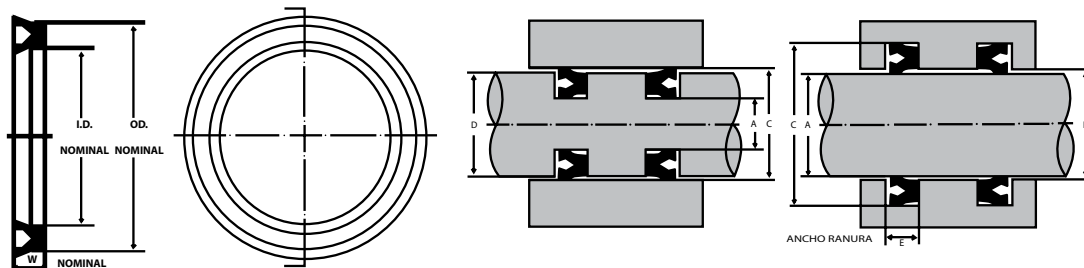

CODIGO N°	DIMENSIONES NOMINALES DEL SELLO						A Ø RANURA EN EL PISTON (ALOJAMIENTO DEL SELLO) - VASTAGO				Ø SOPORTE VASTAGO			
	PULGADAS			MILIMETROS			PULGADAS		MILIMETROS		PULGADAS		MILIMETROS	
	W	I.D.	O.D.	W	I.D.	O.D.	Ø	T	Ø	T	Ø	T	Ø	T
8504-0037	1/8	3/8	5/8	3,17	9,52	15,87	.375	↑	9,52	↑	.376	↑	9,55	↑
8504-0050	1/8	1/2	3/4	3,17	12,70	19,05	.500	↑	12,70	↑	.501	↑	12,72	↑
8504-0062	1/8	5/8	7/8	3,17	15,87	22,22	.625	↑	15,87	↑	.626	↑	15,90	↑
8504-0075	1/8	3/4	1	3,17	19,05	25,40	.750	↑	19,05	↑	.751	↑	19,07	↑
8504-0100	1/8	1	1 1/4	3,17	25,40	31,75	1.000	↑	25,40	↑	1.001	↑	25,42	↑
8505-0093	5/32	15/16	1 1/4	3,96	23,81	31,75	.938	↑	.000	0,00	.939	↑	23,85	↑
8505-0100	5/32	1	1 5/16	3,96	25,40	33,33	1.000	↑	.001	0,025	1.001	↑	25,42	↑
8505-0118	5/32	1 3/16	1 1/2	3,96	30,16	38,10	1.188	↑	.000	.000	1.189	↑	30,20	0,051
8505-0125	5/32	1 1/4	1 9/16	3,96	31,75	39,68	1.250	↑	.000	.000	1.251	↑	31,77	↑
8505-0137	5/32	1 3/8	1 11/16	3,96	34,92	42,85	1.375	↑	.000	.000	1.376	↑	34,95	↑
8506-0150	3/16	1 1/2	1 7/8	4,76	38,10	47,62	1.500	↑	.000	.000	1.501	↑	38,12	↑
8506-0162	3/16	1 5/8	2	4,76	41,27	50,80	1,625	↑	.000	.000	1,626	↑	41,30	↑
8506-0175	3/16	1 3/4	2 1/8	4,76	44,45	53,97	1,750	↑	.000	.000	1,751	↑	44,47	↑
8506-0200	3/16	2	2 3/8	4,76	50,80	60,32	2,000	↑	.002	0,051	2,001	↑	50,82	↑
8506-0212	3/16	2 1/8	2 1/2	4,76	53,97	63,50	2,125	↑	.000	.000	2,126	↑	54,00	↑
8506-0250	3/16	2 1/2	2 7/8	4,76	63,50	73,02	2,500	↑	.000	.000	2,501	↑	63,52	↑
8507-0256	7/32	2 9/16	3	5,55	65,08	76,20	2,562	↑	.000	.000	2,563	↑	65,10	↑
8507-0281	7/32	2 13/16	3 1/4	5,55	71,43	82,55	2,812	↑	.000	.000	2,813	↑	71,45	↑
8507-0300	7/32	3	3 7/16	5,55	76,20	87,31	3,000	↑	.000	.000	3,001	↑	76,22	↑
8507-0306	7/32	3 1/16	3 1/2	5,55	77,78	88,90	3,062	↑	.000	.000	3,063	↑	77,80	↑
8508-0350	1/4	3 1/2	4	6,35	88,90	101,60	3,500	↑	.003	0,076	3,501	↑	88,92	0,076
8508-0400	1/4	4	4 1/2	6,35	101,60	114,30	4,000	↑	.003	.000	4,001	↑	101,62	↑
8509-0443	9/32	4 7/16	5	7,14	112,71	127,00	4,437	↑	.000	.000	4,438	↑	112,72	↑
8509-0500	9/32	5	5 9/16	7,14	127,00	141,28	5,000	↑	.000	.000	5,001	↑	127,02	↑
8510-0537	5/16	5 3/8	6	7,93	136,52	152,40	5,375	↑	.000	.000	5,376	↑	136,55	↑
8510-0737	5/16	7 3/8	8	7,93	187,32	203,20	7,375	↑	.000	.000	7,376	↑	187,35	↑
8511-0931	11/32	9 5/16		8,73	236,53	254,00	9,312	↑	.000	0,102	9,314	↑	236,57	0,127

Si el diámetro interior del cilindro llegara a ser mayor que las dimensiones indicadas en la tabla, pero en un porcentaje que no supere el 5%, reste el diámetro indicado del real, agregue la diferencia resultante a la indicada para pistón o diámetro de ranura, para su correcta aplicación.